




### P3 625JCASS—Seamless Trunk Cable With Jelly

#### Description

	Material	Diameter (mm)
Inner Conductor	Copper Clad Aluminum	3.48
Dielectric	Foamed PE	14.35
Outer Conductor	Extruded Aluminum Tube	15.88
Flooded	Jelly	/
Sheath	BLACK PE	17.40

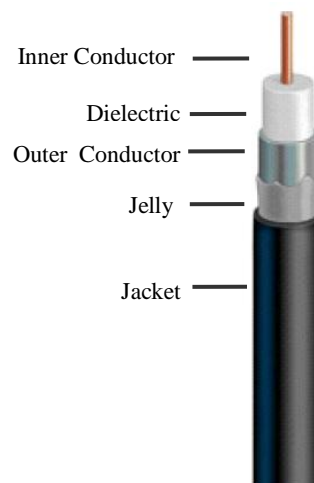

#### Characteristics

Capacitance	50.2 pF/m nom.
Impedance	75±2 ohms
Velocity	87% Min
DC Loop Resistance	3.61 ohm/km nom.

Inner Conductor DC Resistance	2.76ohm/km nom.
Outer Conductor DC Resistance	0.85 ohm/km nom.
SRL 5-1000MHz	30dB Min.
Operating Temperature	-40°C~+70°C

#### Transmission @ 20°C

Frequency MHz	Attenuation Max. dB/100m
5	0.43
55	1.48
211	3.02
250	3.28
300	3.54
350	3.87
400	4.17

Frequency MHz	Attenuation Max. dB/100m
450	4.43
500	4.69
550	4.92
600	5.18
750	5.84
865	6.33
1000	6.79

